


## Product information VITOLEN 120 S 032

Closed-cell crosslinked polyethylene foam, equipped on one side with a low adherent adhesive on PET-film.

## Product composition

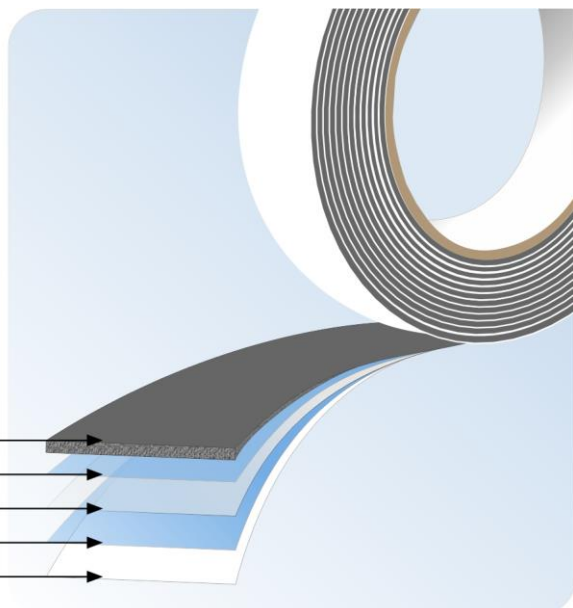

**carrier**, PE-foam, anthracite or white  
**laminating adhesive**  
**subcarrier**, PET-film  
**adhesive**, low adherent acrylate  
**liner**, siliconised paper, white

## Application

VITOLEN 120 S 032 is used to protect and to hold distance between products with sensitive surfaces.

## Product benefits

- easy removable after usage
- absorption of vibrations
- the closed-cell foam absorbs nearly no moisture
- compatible with acryl glass

## Technical data

thickness	2 to 6 mm
density (DIN EN ISO 845)	33 kg/m <sup>3</sup>
compressive strength (DIN EN ISO 3386-1) at 25 % deformation at 50 % deformation	35 kPa 100 kPa
compression set (DIN EN ISO 1856-C) 22 h at 23 °C and 25 % deformation 0.5 h after discharge 24 h after discharge	20 % 10 %
temperature resistance	-40 °C to 70 °C
application temperature	15 °C to 30 °C

## VITOLEN 120 S 032

### Processing

The most important processing parameters and information on cleaning are listed in our "Instructions for the application of adhesive tapes".

### Storage and shelf live

12 month after receipt of goods, when stored at 18 °C and 60 % relative humidity out of direct sunlight, in original packaging

### Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our general conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to [info@vito-irmen.de](mailto:info@vito-irmen.de)

10/2017 Fi