

Product information


VITOMOUNT 125 SS-70 PBR

Double-sided self-adhesive foam tape for high performance needs.

Delivery form

Rolls

Product composition

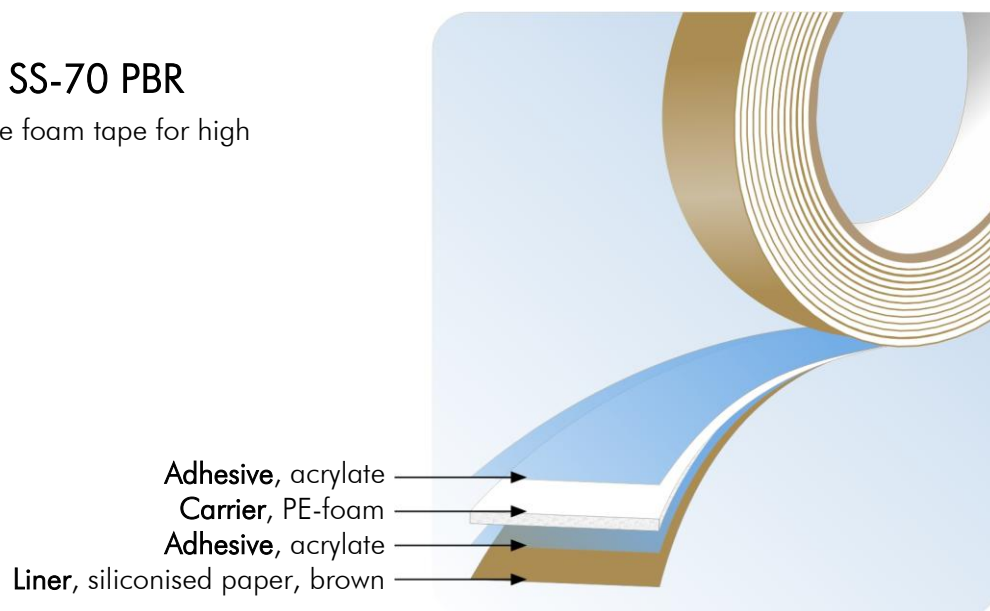

Application

This tape is suitable for permanent mounting of materials with even or slightly rough surfaces, for indoor and outdoor use. It is particularly suitable for mounting mirrors, also in rooms with temporary higher air humidity as in bathrooms. The application as mirror mounting tape on a furniture surface was certified by LGA Nürnberg, Germany, by using the tape with a thickness of 1 mm.

Product benefits

- Outstanding initial and excellent final adhesive strength
- Very good ageing, weather and plasticiser resistance
- Compatible with mirror finish and acryl glass
- Compensating of slight unevenness and thermal expansion
- Tearable paper liner

Technical data and product properties

| | | |
|--------------------------------------------------|----------------------------------|-------------------------------------------------------------------------------|
| thickness | | 1 and 1.6 mm |
| colour | | white or anthracite (1,6 mm in anthracite on request) |
| peel adhesion on steel acc. DIN EN 1939:1996 | at 20 °C | 20 N/25mm |
| shear adhesion on steel acc. DIN EN 1943:1996 | at 20 °C at 50 °C at 70 °C | 40 N/625mm ² 30 N/625mm ² 20 N/625mm ² |
| temperature resistance | | -40 °C to 100 °C |
| application temperature | | 15 °C to 30 °C |

VITOMOUNT 125 SS-70 PBR

Processing

The most important processing parameters and information on cleaning are listed in our [Instructions for the application of adhesive tapes](#) and [Application of self-adhesive tapes for mirrors](#).

Storage and shelf life

12 months after receipt of goods, when stored at room temperature ($20 \pm 3 \text{ }^{\circ}\text{C}$) and 40 - 60 % relative humidity, protected from sunlight, in original packaging.

Alternatives

VITOMOUNT 125 SS-70, white in 1.0 or 1.6 mm / anthracite in 1 mm, with siliconised PP-film, green
VITOMOUNT 125 SS-70 FBL2, white in 1.0 or 1.6 mm / anthracite in 1 mm, with siliconised PP-film, blue
VITOMOUNT 125 SS-100, white in 0.8 mm, with siliconised PP-film, green

Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. We reserve the right to make technical changes that are in the interest of progress. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmen.de or visit our [website](#), where these confirmations are available.

04/2025 Fi