


Product information

VITOMOUNT DG 75 FBL2

Double-sided self-adhesive foam tape for high performance needs.

Product composition

Adhesive, pure acrylate
 Carrier, PE-foam, black
 Adhesive, pure acrylate
 Liner, siliconised PP-film, 112 µm, blue

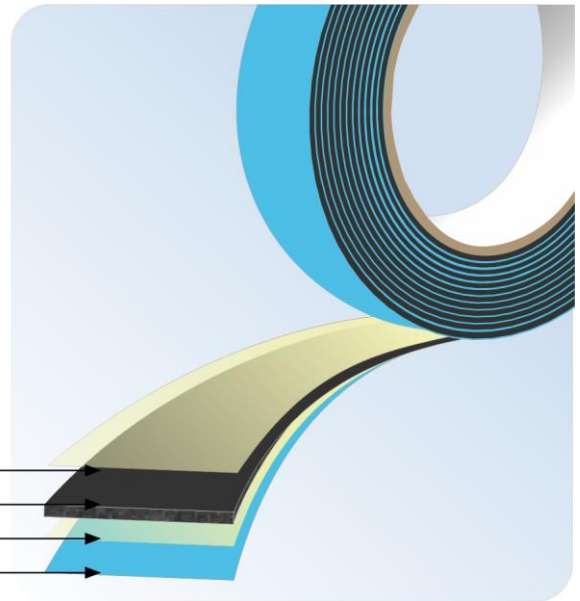

Application

This tape is suitable for permanent mounting of materials with even or slightly rough surfaces, for indoor and outdoor use.

It is particularly suitable for mounting glass to PVC profiles, e.g., as a glazing tape for PVC windows.

The product has been certified for this application by ift Rosenheim with certificate no. 15-000371-PR03.

Product benefits

- Outstanding initial and excellent final adhesive strength
- Very good ageing, weather and plasticiser resistance
- Absorption of vibrations
- Compensation of slight unevenness and thermal expansion
- External certification by ift Rosenheim according to ift guideline VE-08/3 – part 1.

Technical data and product properties

thickness		1.6 mm
colour		black
peel adhesion on steel acc. DIN EN 1939:1996	at 20 °C	26 N / 25 mm
shear adhesion on steel acc. DIN EN 1943:1996	at 20 °C	60 N / 625 mm ²
thermal conductivity ISO 8301	at 20 °C at 40 °C	0,038 W/m·K 0,041 W/m·K
temperature resistance		-40 °C to 100 °C
application temperature		15 °C to 30 °C

VITOMOUNT DG 75 FBL2

Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

Storage and shelf life

12 month after receipt of goods, when stored at 18 °C and 60 % relative humidity protected from sunlight, in original packaging.

Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmen.de

07/2016 Fi