


Product information

VITOCOLL 104

Transfer tape based on a paper fleece equipped with a synthetic rubber on both sides.

Product composition

Adhesive, synthetic rubber
Carrier, paper fleece
Adhesive, synthetic rubber
Liner, siliconised paper, yellow-brown

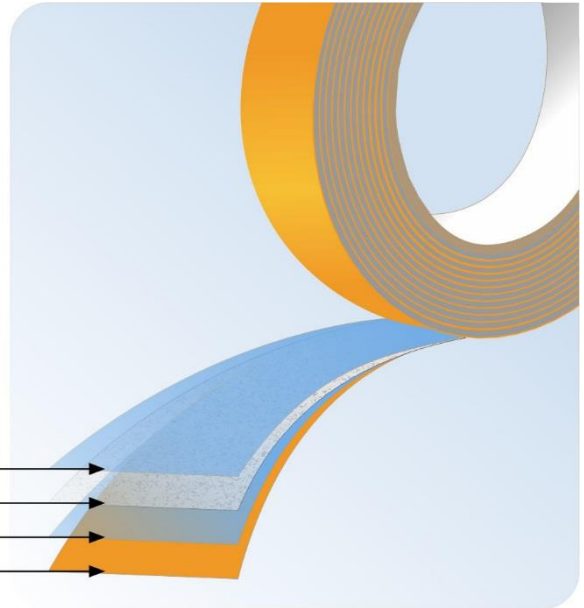

Application

VITOCOLL 104 is used for applications on open or closed cell foams and materials such as felt, film, paper, tissue, plastics and profiles.

Product benefit

- good adhesion on low energy and cold surfaces
- compatible with acrylic glass

Technical data and product properties

thickness	0.1 mm	
peel adhesion at 23 °C acc. to DIN EN 1939:1996	on stainless steel on PE	20 N / 25 mm 10 N / 25 mm
shear adhesion on stainless steel acc. to DIN EN 1943:1996	at 23 °C	5 N / 625 mm ²
temperature resistance	-20 °C to 60 °C	
application temperature	5 °C to 30 °C	
weathering resistance	good	
compatibility with acrylic glass	yes	

Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

Storage and shelf life

6 month after receipt of goods, when stored at 18 °C and 60 % relative humidity protected from sunlight, in original packaging

Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmen.de

05/2015 Ki