


Product information

VITOCOLL 132A07

Transfer tape based on a pure acrylate.

Product composition

Adhesive, pure acrylate
Liner, siliconised paper, white

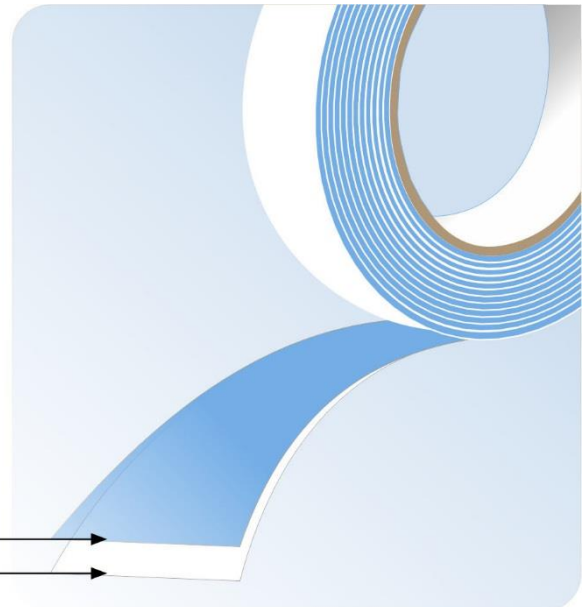

Application

VITOCOLL 132A07 was designed for indoor and outdoor applications and for lamination of materials such as metal, plastics and glass. The product is used for the mounting of signboards, nameplates, decorations, ornamental plates, fittings, and displays.

Product benefit

- the thin adhesive film enables to design thin constructions
- good resistance to chemicals, solvents and plasticizer
- high cohesion of the adhesive
- compatible with acrylic glass

Technical data and product properties

thickness	0.07 mm	
peel adhesion stainless steel acc. to DIN EN 1939:1996	at 23 °C	15 N / 25 mm
shear adhesion stainless steel acc. to DIN EN 1943:1996	at 23 °C	60 N / 625 mm ²
temperature resistance	-40 °C to 150 °C	
application temperature	15 °C to 30 °C	
weathering resistance	very good	
compatibility with acrylic glass	yes	

Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

Storage and shelf life

12 month after receipt of goods, when stored at 18 °C and 60 % relative humidity protected from sunlight, in original packaging

Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmen.de

05/2015 Ki