


## Product information

### VITOKORK Soft

The product consists of agglomerated cork, coated on one side with a self-adherent PVC-foam.

## Product composition

carrier, agglomerated cork  
laminating adhesive  
PVC soft foam

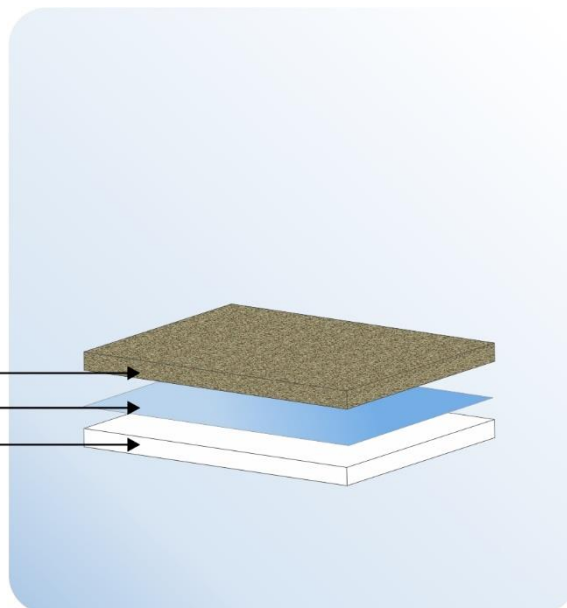

## Application

VITOKORK Soft is used as distance and shipping pads on glass.

## Product benefit

- repositionable
- high compression resistance
- shock-absorbent
- slip-resistant

## Technical data and product properties

density cork (DIN EN ISO 845)	ca. 190 kg/m <sup>3</sup>	
compression resistance (DIN EN ISO 3386)	10 %	30 N/cm <sup>2</sup>
	20 %	50 N/cm <sup>2</sup>
	30 %	70 N/cm <sup>2</sup>
	40 %	90 N/cm <sup>2</sup>
	50 %	110 N/cm <sup>2</sup>
temperature resistance	-30 °C to 60 °C	

## Delivery forms

individually punched in bulk

aligned on roll without protective plastic film covering

aligned on roll with protective plastic film covering

for LISEC automatic processing, on roll or bobbin

for BYSTRONIC/LENHARDT automatic processing, on roll or bobbin

## Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes. In a few cases the PVC foam leaves marks on glass, which are normally easy to remove with an appropriate cleaning agent.

## Storage and shelf life

6 month after receipt of goods, when stored at 18 °C and 60 % relative humidity protected from sunlight, in original packaging.

## Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to [info@vito-irmen.de](mailto:info@vito-irmen.de)

version: 10/2016 jk