


Technical product information

VITOPUR Abstandhalter

The product consists of a PU rebonded foam equipped with a low-adherent pressure sensitive acrylic adhesive.

Product composition

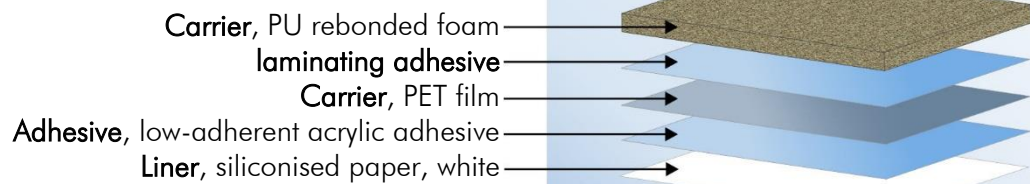

Application

VITOPUR Abstandhalter are used as distance pads on substrates like unpainted wood, PVC, glass or metal.

Product benefit

- creates a defined distance
- clean removable

Technical data and product properties

thickness	7 mm or 10 mm	
colour	marbled	
foam density (DIN EN ISO 845)	220 kg/m ³ ± 10 %	
compression set (DIN EN ISO 1856)	max. 22 %	
compression (DIN EN ISO 3386)	at 40 % compression	140 kPa ± 28 kPa
temperature resistance	-40 °C to 90 °C	

VITOPUR Abstandhalter

Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

Storage and shelf life

6 month after receipt of goods, when stored at room temperature and 60 % relative humidity protected from sunlight, in original packaging.

Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmen.de

01/2016 Ru