


Product information

VITO-XPS Abstandhalter (Spacer)

The product consists of polystyrene hard foam, equipped with a low tack pressure sensitive adhesive on one side.

Product composition

Carrier, extruded polystyrene hard foam
 Adhesive, acrylate
 Reinforcement, PET-film
 Adhesive, acrylate
 Liner, siliconised paper, white

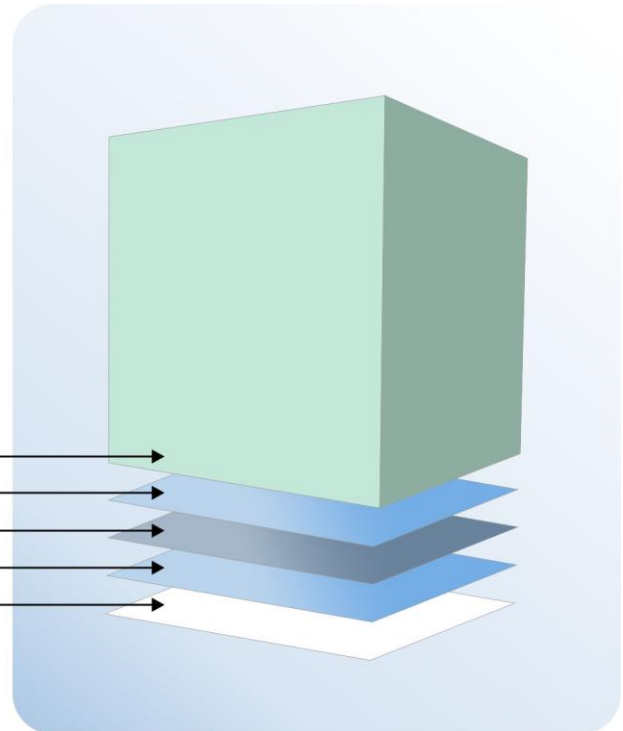

Application

VITO-XPS Abstandhalter are used for spacing and stacking. The preferred use is the application on plastic windows without protection film and for varnished surfaces.

Product benefits

- repositionable
- clean removable
- high compressive strength

Technical data and product properties

thickness	20 mm	30, 40, 50 mm
color	light purple	light green
density (DIN EN ISO 845)	44 kg/m ³	33 kg/m ³
maximum pressure load* (derived from compression hardness according to DIN EN ISO 3386)	100 kPa ^{a)}	350 kPa ^{b)}
dimension	50 mm x 50 mm	
temperature resistance	-40 °C to 50 °C	
application temperature	15 °C to 30 °C	

* Corresponds to a compression of approx. 2 %. This correlates to a load of a) about 25 kg and b) about 90 kg related to the surface of one distance pad.

Processing

Lift the paper liner over the edge by thumb. Further processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

Storage and shelf life

12 month after receipt of goods, when stored at room temperature and 60 % relative humidity protected from sunlight, in original packaging.

Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmen.de

06/2015 Ki