


Product information VITOBLEI 610

The product is a single coated self-adhesive lead foil.

Product composition

liner, siliconised film, white
adhesive, acrylate
carrier, lead foil, 100 microns

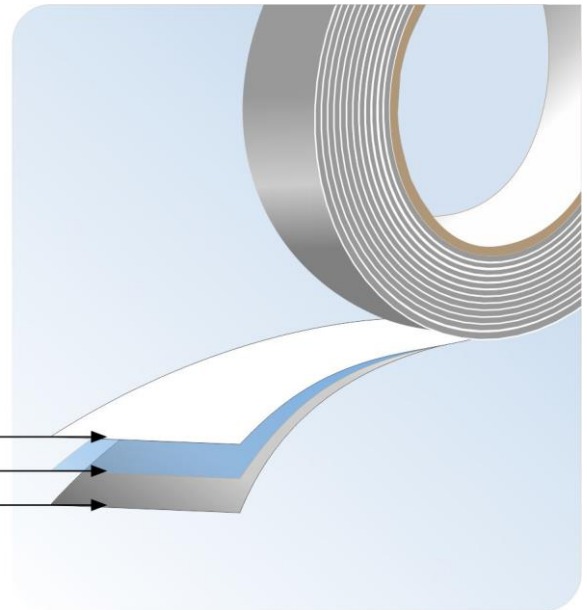

Application

VITOBLEI 610 is used in electroplating companies to cover not to be coated areas. The product is also used in the drawing and craft sector to border paintings or other decorated glass pictures. Furthermore the use of VITOBLEI 610 can be helpful to repair historical lead roofs.

Product benefits

- resistant against sulfuric acid, hydrofluoric acid and hydrochloric acid
- weather resistant
- water and air tight
- good adhesive strength to even surfaces

Technical data and product properties

pure lead	97 %	
peel adhesion on steel acc. to DIN EN 1939:1996	at 20 °C	20 N/25 mm
shear adhesion on steel acc. to DIN EN 1943:1996	at 20 °C	30 N/6.25 cm ²
compatibility with acrylic glass	yes	
temperature resistance	-40 °C to 120 °C	

VITOBLEI 610

Processing

The most important processing parameters and information about cleaning are listed in our Information on Processing Adhesive Tapes.

Storage and shelf life

12 months after receipt of goods, when stored at 18 °C and 60 % relative humidity, protected from sunlight, in original packaging.

Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send an e-mail to info@vito-irmen.de

version: 08/2016 jk