


## Product information

### VITOCOLL T 401

Thin adhesive tape based on a paper fleece equipped with an acrylic dispersion on both sides.

## Product composition

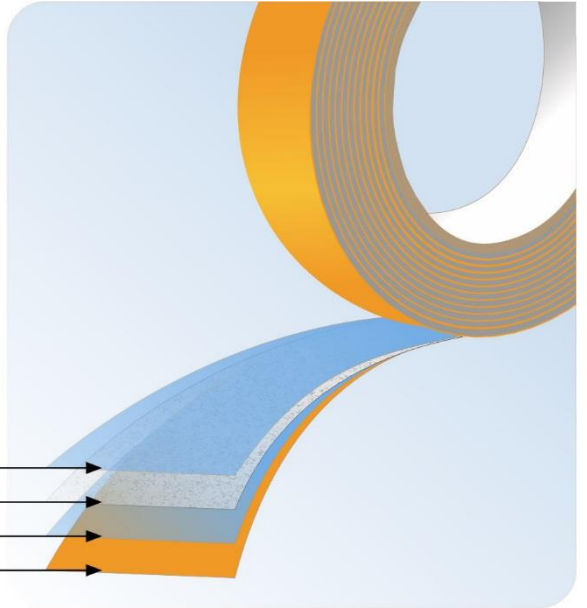

Adhesive, acrylic dispersion  
Carrier, paper fleece  
Adhesive, acrylic dispersion  
Liner, siliconised paper, yellow-brown

## Application

VITOCOLL T 401 is used for adhesion and lamination of decorative material, trims and fittings, displays and other adhesive applications.

## Product benefits

- good adhesion on low energy surfaces, such as PE and PP
- good UV resistance

## Technical data and product properties

thickness	0.10 mm	
peel adhesion on stainless steel acc. to DIN EN 1939:1996	at 23 °C	16 N / 25 mm
shear adhesion on stainless steel acc. to DIN EN 1943:1996	5 N / 625 mm <sup>2</sup>	
temperature resistance	-40 °C to 100 °C	
application temperature	15 °C to 30 °C	
UV resistance	good	
weathering resistance	good	
resistance to chemicals With expert application resistant to most oils, grease, fuels, aliphatic solvents, weak acids, salts and alkalis.	good	

## VITOCOLL T 401

### Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

### Storage and shelf life

12 month after receipt of goods, when stored at 18 °C and 60 % relative humidity protected from sunlight, in original packaging

### Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to [info@vito-irmen.de](mailto:info@vito-irmen.de)

05/2015 Ki