


Product information

VITOMOUNT 125-70

Double-sided self-adhesive foam tape.

Product composition

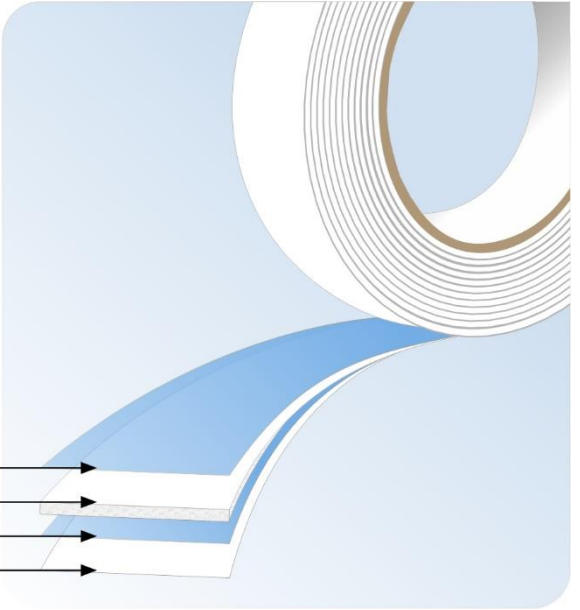

Adhesive, acrylic dispersion
Carrier, PE foam, anthracite or white
Adhesive, acrylic dispersion
Liner, siliconised paper, white

Application

VITOMOUNT 125-70 is used as mounting aid and for easy mounting of light materials like strips, profiles, signs, emblems and paper boards. Not suitable for adhesion on polycarbonate and acrylic glass.

Product benefits

- good adhesion to various surfaces
- high initial tack
- absorbs vibrations
- compensates slight roughnesses and thermal expansion

Technical data and product properties

thickness	1 and 1.6 mm	
colour	white or anthracite (1.6 mm in anthracite on request)	
peel adhesion on stainless steel acc. to DIN EN 1939:1996	at 20 °C	20 N/25 mm
shear adhesion on stainless steel acc. to DIN EN 1943:1996	at 20 °C at 50 °C	15 N/625 mm ² 5 N/625 mm ²
temperature resistance	-40 °C to 70 °C	
application temperature	10 °C to 30 °C	

VITOMOUNT 125-70

Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

Storage and shelf life

12 month after receipt of goods, when stored at 18 °C and 60 % relative humidity protected from sunlight, in original packaging.

Special Information

All data and technical information presented are based on laboratory tests or have been compiled from supplier information to the best of our knowledge. A guarantee that the values are complete and correct can however not be given. You are kindly requested to conduct your own tests to determine the suitability of our product for your applications. Our General Conditions answer any questions on guarantees and liabilities for these products insofar as no other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmen.de

06/2015 Ki