


Product information

VITOPLAST 130

One-sided self-adhesive sealing tape. It consists of polyurethane foam based on polyester, reinforced by polyester film.

Product composition

carrier, PUR-foam, white or grey
adhesive, acrylic dispersion
reinforcement, PET-film, transparent
adhesive, acrylic dispersion
liner, siliconised PO-film, white

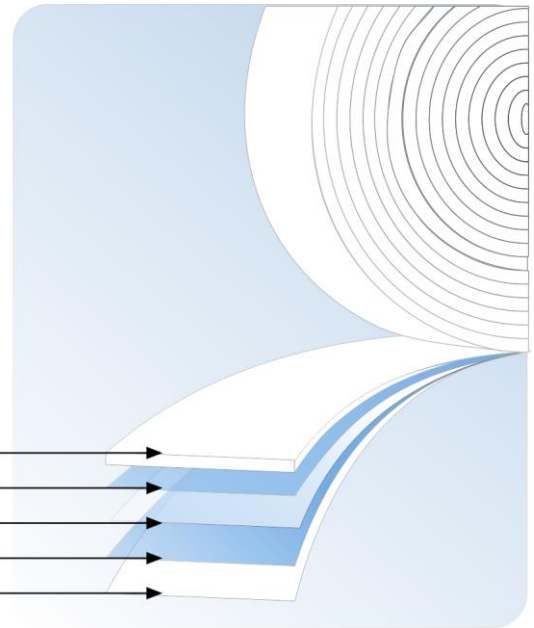

Application

The product is appropriate for sealing, damping and protecting.

Product benefits

- Excellent resilience due to the open-cell structure
- good adhesion on different surfaces
- very good adaption to uneven surfaces

Technical data and product properties

| | |
|--|----------------------|
| thickness | 3, 6 and 9 mm |
| density (DIN EN ISO 845) | 28 kg/m ³ |
| compressive strength (DIN EN ISO 3386-1) at 40 % deformation | 4 - 6 kPa |
| weathering resistance | good |
| temperature resistance | -20 °C to 120 °C |

VITOPLAST 130

Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

Storage and shelf live

12 month after receipt of goods, when stored at 18 °C and 60 % relative humidity out of direct sunlight, in original packaging

Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmen.de

09/2014 Fi