


Product information VITOKORK Soft

The product consists of agglomerated cork, coated on one side with a self-adherent PVC-foam.

Product composition

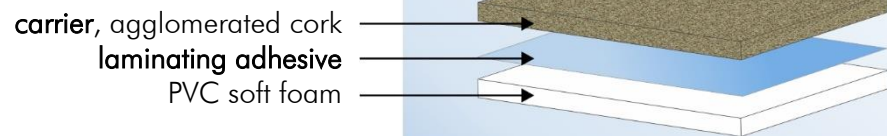

Application

VITOKORK Soft is used as distance and shipping pads on glass.

Product benefits

- easy to remove
- high compression resistance
- shock-absorbent
- slip-resistant

Technical data and product properties

density cork (DIN EN ISO 845)	ca. 190 kg/m ³	
compression resistance (DIN EN ISO 3386)	10 %	30 N/cm ²
	20 %	50 N/cm ²
	30 %	70 N/cm ²
	40 %	90 N/cm ²
	50 %	110 N/cm ²
temperature resistance	-30 °C to 60 °C	

VITOKORK Soft

Delivery forms

doubled and in bulk

stamped pieces aligned on roll without liner protection

stamped pieces aligned on roll with liner protection

for BYSTRONIC/LENHARDT automatic processing, aligned on roll or bobbin

for LISEC automatic processing, on roll or bobbin

for FOREL automatic processing, on bobbin

Processing

The most important processing parameters and information on cleaning are listed in our instructions for the application of adhesive tapes.

Storage and shelf life

6 months after receipt of goods, when stored at room temperature ($20 \pm 3 \text{ }^{\circ}\text{C}$) and 40 - 60 % relative humidity, protected from sunlight, in original packaging.

Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. We reserve the right to make technical changes that are in the interest of progress. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmen.de

version: 04/2022 Fi/ED