


Technical product information VITOFOAM PVC Stapelscheiben

distance and shipping pads made of PVC Foam

Product composition

carrier, PVC foam, blue
adhesive, acrylic PSA, low-adherent
Liner, siliconised paper, white

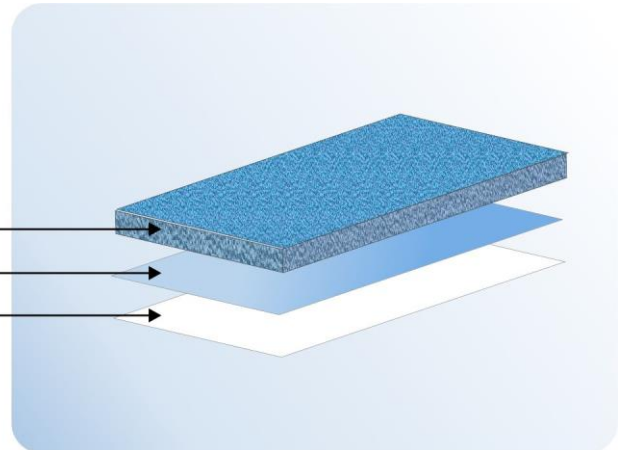

Application

VITOFOAM PVC Stapelscheiben are used as distance and shipping pads on glass.

Product benefits

- easy removable
- shock-absorbing
- anti-slip

Technical data and product properties of the foam

thickness	4 mm
density (DIN EN ISO 845)	320 - 350 kg/m ³
compression deflection (ASTM 1667)	0 sec. 80 - 310 kPa 60 sec. 40 - 160 kPa
Shore hardness 00	65 - 80
compression set (DIN 53572) 50 % / 23 °C / 72 h	≤ 25 %
water absorption	≤ 40 %
UV resistance	sehr gut
temperature resistance	-30 °C to +60 °C

VITOFOAM PVC Stapelscheiben

Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

Storage and shelf life

6 months after receipt of goods, when stored at roomtemperature ($20 \pm 3 \text{ }^{\circ}\text{C}$) and 40 - 60 % relative humidity, protected from sunlight, in original packaging.

Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. We reserve the right to make technical changes that are in the interest of progress. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmen.de

Ausgabe: 04/2021 Fi