


Preliminary product information VITOMOUNT PRO 70

Double-sided self-adhesive foam tape with a high adhesive strength and easy removability after application.

Product composition

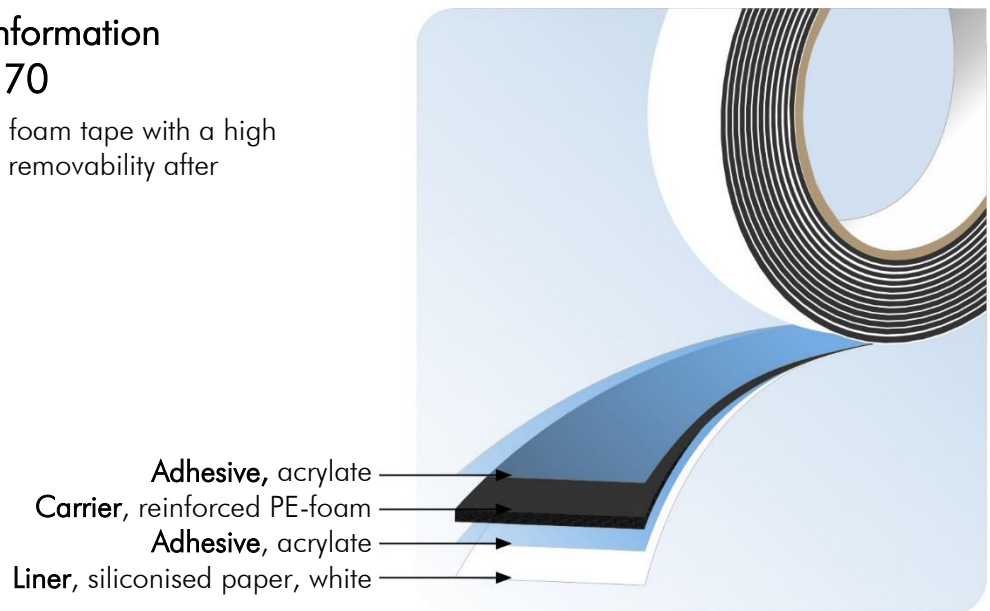

Application

The adhesive tape is used for indoor- and outdoor area attachment on various surfaces. Especially good for exhibition stand construction, where an easy removability of the tape at dismantling is required.

Product benefits

- Outstanding initial and excellent final adhesive strength
- Absorption of vibrations
- Compensation of slight unevenness and thermal expansion
- Very good ageing, weather and plasticiser resistance

Technical data and product properties

thickness	1,2 mm	
colour	white or black	
shear adhesion on stainless steel acc. to DIN EN 1943:1996	at 20 °C	40 N / 625 mm ²
temperature resistance	-40 °C to 100 °C	
application temperature	15 °C to 30 °C	

VITOMOUNT PRO 70

Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

Storage and shelf life

12 month after receipt of goods, when stored at room temperature ($20\text{ °C} \pm 3\text{ °C}$) and 40 - 60 % relative humidity protected from sunlight, in original packaging.

Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send an e-mail to info@vito-irmen.de

Version: 7/2018 MB