

Product information


VITOMOUNT 125 SSPR-70 S 003

Double-sided self-adhesive foam tape for high performance requirements.

Delivery form

Rolls, bobbins or die-cuts.

Product composition

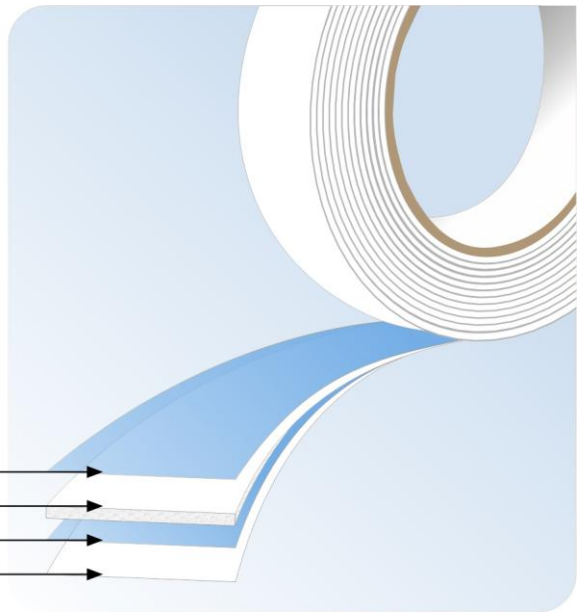

Adhesive, acrylate
Carrier, PE foam
Adhesive, acrylate
Liner, siliconised PE-paper, white, 120 µm

Application

This tape is suitable for permanent mounting of materials with even or slightly rough surfaces, for indoor and outdoor use. It is particularly suitable for bonding PVC profiles to glass, e. g., for Georgian bars. The bonding of PVC profiles on insulating glass has been tested and certified by the Institute for Window Technology (ift) of Rosenheim, Germany, using the tape with a thickness of 1 mm.

Product benefits

- Outstanding initial and excellent final adhesive strength
- Very good ageing, weather and plasticiser resistance
- Absorption of vibrations
- Compensating of slight unevenness and thermal expansion

Technical data and product properties

thickness		1 or 1.6 mm
colour		white or anthracite (1.6 mm in anthracite upon request)
peel adhesion on steel acc. DIN EN 1939:1996	at 20 °C	20 N / 25 mm
shear adhesion on steel acc. DIN EN 1943:1996	at 20 °C at 50 °C at 70 °C	40 N / 625 mm ² 30 N / 625 mm ² 20 N / 625 mm ²
temperature resistance		-40 °C to 100 °C
application temperature		15 °C to 30 °C

VITOMOUNT 125 SSPR-70 S 003

Processing

The most important processing parameters and information on cleaning are listed in our [Instructions for the application of adhesive tapes](#).

Storage and shelf life

12 months after receipt of goods, when stored at room temperature ($20\text{ °C} \pm 3\text{°C}$) and 40 - 60 % relative humidity protected from sunlight, in original packaging.

Product alternatives

VITOMOUNT 125	PE foam	liner	delivery forms
SSPR-70 PBR	1 or 1.6 mm	siliconised paper, brown	rolls and die-cuts
SSPR-70 PLG1	1 or 1.6 mm	siliconised PP film, 70 μm , green	rolls and bobbins
SSPR-70 FBL2	1 or 1.6 mm	siliconised PP film, 110 μm , blue	rolls and bobbins
SSPR-70 FG	1 or 1.6 mm	siliconised PP film, 100 μm , yellow	rolls and bobbins
SSPR-100 PLG1	0.8 mm, white	siliconised PP film, 70 μm , green	rolls and bobbins

Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmen.de or visit our [website](#), where these confirmations are available.

04/2025 Fi