

Product information

VITOMOUNT 125 S-201 RP

Double-sided self-adhesive foam tape.

Product composition


Liner, siliconised paper with finger lift

Adhesive, acrylate

Carrier, PE foam, 0.8 mm, black

Adhesive, acrylate

Liner, siliconised paper, white

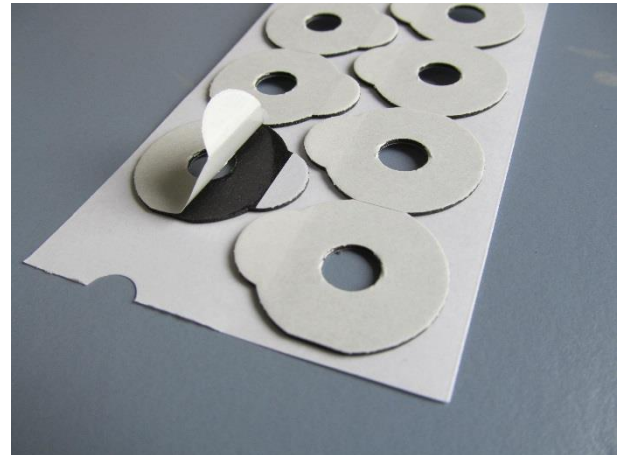

Application

VITOMOUNT 125 S-201 RP was designed for fixing lenses on the blocker during the grinding process. The high stability of the foam and the high cohesion of the adhesive avoid separating of blocker and lenses due to torsion force.

Product benefits

- thin foam core
- high initial tack and very high final adhesive strength
- easy removable from blocker and lenses
- equipped with finger lift

Technical data and product properties

peel adhesion on stainless steel acc. to DIN EN 1939:1996	at 20 °C	18 N/25 mm
shear adhesion on stainless steel acc. to DIN EN 1943:1996	at 20 °C	50 N/625 mm ²
temperature resistance	-40 °C to 90 °C	
application temperature	15 °C to 30 °C	

VITOMOUNT 125 S-201 RP

Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

Storage and shelf life

12 month after receipt of goods, when stored at 18 °C and 60 % relative humidity protected from sunlight, in original packaging.

Special Information

All data and technical information presented are based on laboratory tests or have been compiled from supplier information to the best of our knowledge. A guarantee that the values are complete and correct can however not be given. You are kindly requested to conduct your own tests to determine the suitability of our product for your applications. Our General Conditions answer any questions on guarantees and liabilities for these products insofar as no other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to info@vito-irmen.de

06/2015 Ki